

Digital Display

For strain gauge units, potentiometers,
DC/DC sensors and standard signals

Model 9180

CAD data 2D/3D for this device:
Download directly at www.traceparts.com
Info: refer to data sheet 80-CAD-EN



Panel-mounted version



Desktop version

- Up to 8 sensor parameters can be saved (optional)
- For force, pressure or torque measurements using strain gauge sensors
- For distance or angle measurements with potentiometer or DC/DC sensors
- Processing of standard signals $\pm 1\text{ V} / 10\text{ V} / 0 \dots 1\text{ mA}$, $0(4) \dots 20\text{ mA}$
- Min. or max. peak values via an additional display
- TARE and HOLD function
- Generation of up to 4 limit signals (optional)
- RS232 or RS485 (optional)
- Analog or BCD output (optional)
- Measurement accuracy $< 0.1\%$
- Scaling possible using teach-in procedure or by entering sensor data directly
- Convenient configuration and evaluation software DigiVision

Application

Model 9180 supports force, pressure and torque sensors operating on the strain gauge principle, as well as the connection of position and angle sensors in potentiometer or DC/DC configuration. It also allows the measurement of process signals $\pm 1\text{ V} / 5\text{ V} / 10\text{ V}$ or $0 \dots 1\text{ mA}$, $0(4) \dots 20\text{ mA}$. The current measured value is indicated on the 14 mm high LED main display, while a second display located directly below provides a reading of the peak value.

The display is particularly suitable for highly accurate measurements due to the high accuracy of 0.1%. It is also possible to monitor up to 4 limit values and provide the results via relay or transistor outputs. Thus the process value display can be used for classification, process and control tasks. The current measured value is frozen on the display by activating an external HOLD signal. The TARE function is useful for balancing out previous loads for example. The optional serial interface can be used to transfer measured values and perform device settings. Powerful PC software is available for this on request.

Description

State-of-the-art microprocessor technology has allowed the realization of numerous special functions for practical use. Menu guidance of device setup is standard. Self-explanatory abbreviations greatly facilitate this process so that even inexperienced users can manage without operating instructions. First, the user specifies the type of input signal or sensor. Strain gauge, potentiometer or process signals $0 \dots 1\text{ mA}$, $4 \dots 20\text{ mA}$ or $\pm 1\text{ V}$, $\pm 10\text{ V}$ as well as DC/DC sensors can be selected. Then the calibration process is selected. Users can choose between teach-in or calibration depending on the sensor protocol. The decimal point can be moved as required. The sensor excitation stated in the technical specifications is set automatically upon selection of the sensor type except with process signals. A choice of three excitations is available for process signals. Complete electrical isolation of the measurement channel prevents measurement values from being falsified by ground loops.

Technical Data

Connectable sensors

Strain gauge

Connection system:	4 wire
Bridge resistance:	120 ... 1000 Ω
Bridge voltage:	15/ 30/ 60/ 300 mV, selection via menu
Sensor excitation:	10 V/ 120 mA, automatic 5 V/ 120 mA*

Potentiometer

Track resistance:	500 Ω ... 10 kΩ
Sensor excitation:	10 V/ 120 mA, automatic 5 V/ 120 mA*

Standard signals, DC/DC sensors and transmitters

Voltage input:	± 1 V/ ±10 V
Resolution:	0.1 mV respectively 1 mV
Input resistance:	1 MΩ

Current input:	0 ... 1 mA, 0 (4) ... 20 mA
Resolution:	1 μA
Load:	15 Ω

Transmitters and DC/DC sensors:	10 V/ 120 mA
Excitation:	24 V/ 30 mA 5 V/ 120 mA*

Transmitters can be connected in 2, 3 or 4 wire configuration.

*) if the jumper is set (default setting)

Standard functions

Peak-value memory

Minimum or maximum value on an auxiliary display, cancellation with RESET via keyboard or digital control input.

HOLD function

Freezing of the measured value on the main display.
Active: via ext. HOLD signal

TARE function

Balancing out an offset.
The balanced-out value can also be shown on the auxiliary display.
Active: via button or ext. TARE signal

Digital control inputs

RESET, HOLD, TARE, MIN/MAX (opto-electrically)
Active: 24 V

General specifications

Accuracy

Resolution:	15 Bit
Measurement error:	0.1 % v. E. ± 3 digits
Temperature coefficient:	50 ppm/K
Warm-up period:	10 minutes

LED display

Main display:	- 99999 ... + 99999,	height 14 mm
Auxiliary display:	- 99999 ... + 99999,	height 8 mm
Decimal point:		programmable

Measurement rate 16/sec.

Environmental conditions

Operating temperature:	0 ... 50 °C
Relative humidity:	< 95 %
Protection class:	Front panel IP65

Dimensions/weight

Panel-mounted version:	
Dimensions (W x H x D):	96 x 48 x 120 mm
Installation depth incl. connector:	approx. 150 mm
Cut-out in front panel:	92 x 44 mm
Weight:	600 g
Housing material:	plastic

Desktop version:	Dimensions (W x H x D):	155 x 90 x 210 mm
	Weight:	1.2 kg
	Housing material:	metal/plastic

Electrical connection

Panel-mounted version:	snap-in plug connection
Desktop version:	jacks on the rear panel

Power supply

Desktop version:	115/230 VAC 50 Hz*
Panel-mounted version:	115/230 VAC 50 Hz* or 24/ 48 VAC 50 Hz*

* - 60 Hz on request

Power consumption:	5 VA	without options
	10 VA	with all options

Switch over by means of a jumper

Options

Digital set point alarm outputs

2 relay contacts	250 VAC/ 150 VDC/ 8 A, for 2 limiting values or
4 relay contacts	50 VAC/ DC/ 0.2 A, for 4 limiting values or
4 transistors	open C. switching n or open E. switching P, 50 V/ 50 mA for 4 limits each, opto-decoupled
Response time:	250 ... 750 ms, depending on the filter setting

Analog output

Ranges:	Voltage	0 ... 10 V
	Load	> 50 Ω
	Drift	0,2 mV/K
	or Current	4 ... 20 mA
	Load	< 800 Ω
	Drift	0,5 μA/K

(Selection between 0 ... 10 V and 4 ... 20 mA via the menu)

Resolution:	12 Bit
Potential separation to signal input	
Accuracy:	0.1 % F.S.
Signal response time:	60 ms

Serial interface

RS232 (V.24) or RS485 (half duplex)	
Baud rate:	1200 ... 19200
Data transmission rate:	10 values/sec. at 19200 baud

Networking via RS485 by means of a converter (model 9180-Z001)

BCD interface

Level:	24 V/ TTL
--------	-----------

The BCD option excludes all other options.

The options analog output; RS232 or RS485 (only one) and 2 relays, 4 relays or 4 O.C. (only one); can be used simultaneously.

Calibration


Two basic procedures are possible; in both cases, one display value is allocated to two input variables each (two-point calibration):

1. In the teach-in mode, the two input variables are applied physically as measurement signals to the input. These are assigned to the corresponding display values by pressing an enter key.
2. During calibration in accordance with the sensor protocol, the two signals are not applied physically, but read off from the sensor protocol and entered via the keyboard.

The CAD drawing (3D/2D) for this device can be imported online directly into your CAD system.

Download via www.burster.com or directly at www.traceparts.com. For further information about the burster traceparts cooperation refer to data sheet 80-CAD-EN.

Measuring Data Acquisition and Evaluation

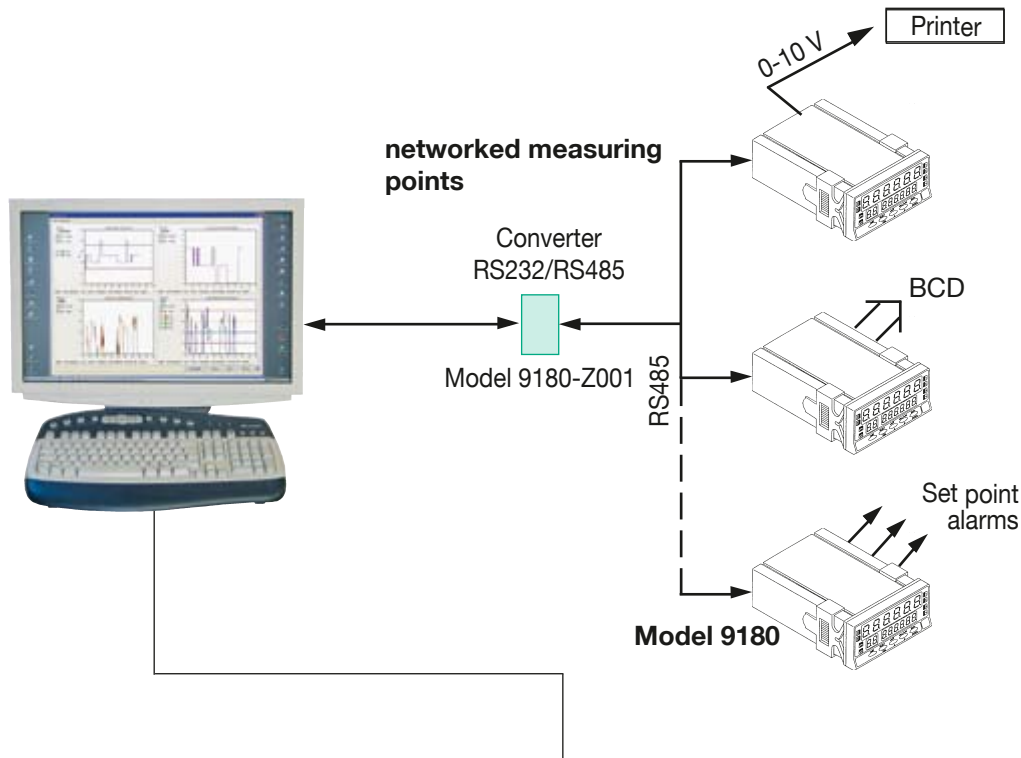


DigiVision 9180-P100 Configuration and Analysis Software


- Comfortable device finder
- Instrument parameterization
- Instrument data adopted automatically eg. scaling, limit settings
- Back-up function for instrument data
- Simultaneous display of up to 8 measurement curves
- Different measurement rates can be combined
- Different triggers can be set: global or channel-specific
- Creation of instrument groups
- Report finder for location group reports and individual reports
- Documenting individual measurement curves with various options e.g. serial number, batch counter, day counter
- Export function to Excel
- Communication with a controller unit (PLC, etc.) via RS232 or Ethernet



Parameterizing of devices

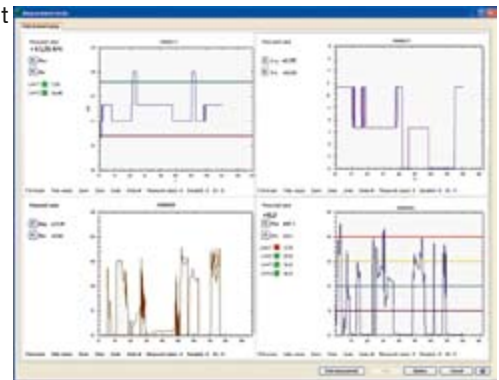

8 measurement curves

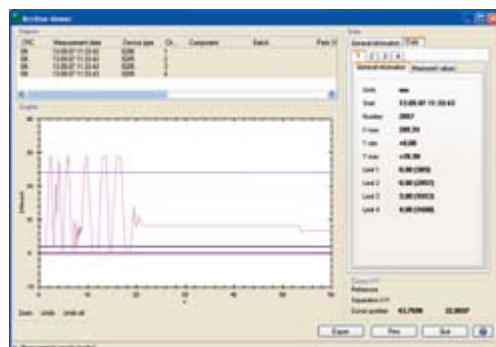

Archive viewer

Excel file


Counter	Time	Measurement value
T1	0.002380	0.000
T2	0.006680	0.000
T3	0.100190	0.000
T4	0.228000	0.000
T5	0.358390	0.000
T6	0.417080	0.000
T7	0.538650	0.000
T8	0.448250	0.000
T9	0.727460	0.000
T10	0.823440	0.000
T11	0.967810	0.000
T12	1.048540	0.000

9180 EN


Displays and Operating Panel



Dimensions Mounting

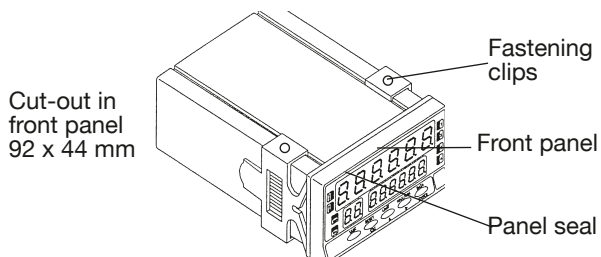


Rear Connection

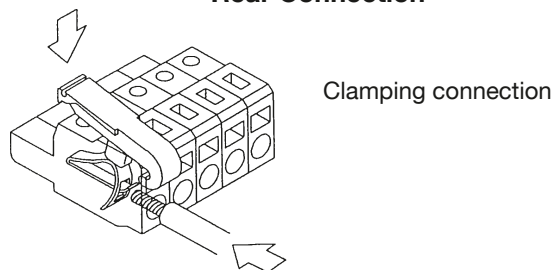

Multichannel Measurement Systems for any Numbers of Channels in Desktop Housing (please enquire)



Front view:
Up to 16 panel-meters in one common housing possible.

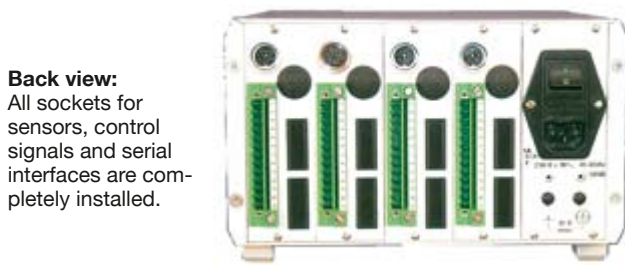

Back view:
All sockets for sensors, control signals and serial interfaces are completely installed.

Order Code

Digital indicator

Version model 9180 - V

8 sensor parameters

Options on extra charge:

Housing and power supply

Panel-mounted version 115/230V-50 Hz²⁾ — 0

Panel-mounted version 24V/48V-50 Hz²⁾ — 1

Desktop version 115/230V-50 Hz²⁾ — 3

Desktop version 24V/48V-50 Hz²⁾ — 6

Analog output

without — 0

0 ... 10 V / 4 ... 20 mA — 1

Interface

without — 0

RS232 — 1

RS485 — 2

BCD¹⁾ — 3

Set point alarm outputs


without — 0

2 relays — 1

4 relays — 2

4 transistor open C. n-switched — 3

4 transistor open E. p-switched — 4

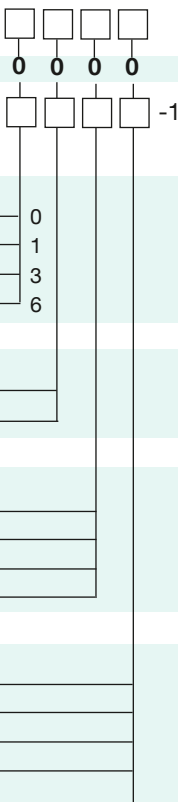

Accessories

Instrument calibration for one sensor ordered with the instrument or using sensor data provided by the customer (e.g. sensitivity, display range of correct reading, excitation voltage or sensor test certificate) (Please specify the calibration data precisely!) **Model 91ABG**

If calibration data not communicated, it will be calibrated as standard sensor-specified.

Strain gauge simulator

See data sheet 76-9405 in section 7 of the Sensors and Process Instruments catalog.



Model 9405

DigiVision 9180-P100 configuration and analysis software for device series 9180

Enables an easy storage of device data, graphical visualization, storage and logging of measurement data **Model 9180-P100**

Converter RS232/RS485

Cartridge with RS485 applications for maximum 32 participants mains adapter included **Model 9180-Z001**

Indicator for angle, pulses or rotation

on request

Data cable

for connection of desktop version and PC **Model 9900-K333**
for connection of panel version and PC **Model 9180-K001**
Interface adapter USB-RS232 **Model 9900-K351**

¹⁾ - Important! The BCD option does not allow any additional options (limiting value or analog output) and is not available as desktop version either.

²⁾ - 60 Hz on request

DigiVision - One for All

One PC Software for the acquisition of measuring data supports following instrument series

NEW


- ▶ **Sensor Master 9163**
- ▶ **DIGIMASTER 9181**
- ▶ **Digital Indicator 9180**
- ▶ **USB Sensor Interface 9205**




- Easy-to-handle instrument recognition
- Intuitive handling through evident and clearly structured operator interface
- Parameter setting without license code
- Automatic take-over of instrument parameters

Show whatever you want !

- Up to 8 simultaneous measurements
- Innovative visualization tools for process parameters
- Outline of manifold process and test information

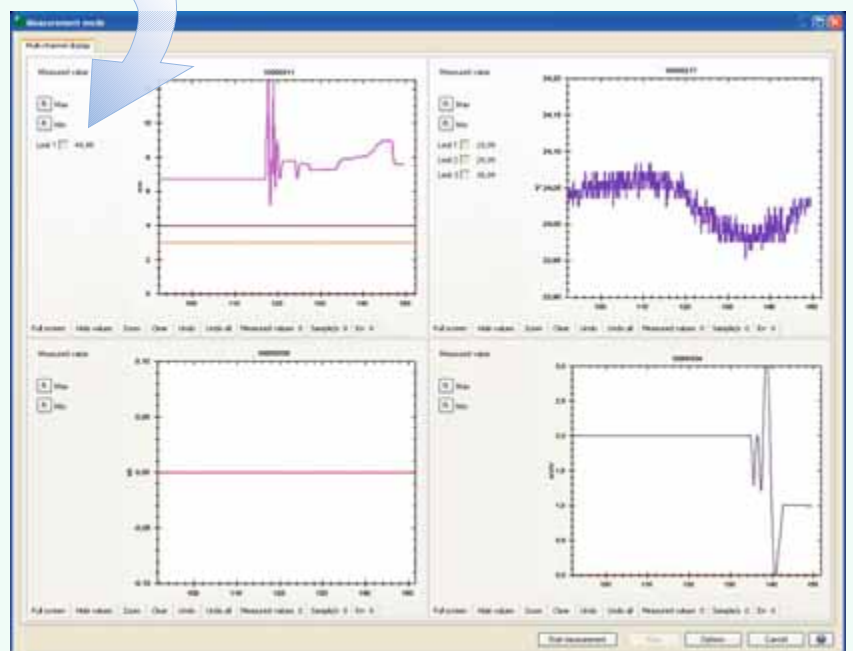


Input mask for configuration towards the affiliated sensor

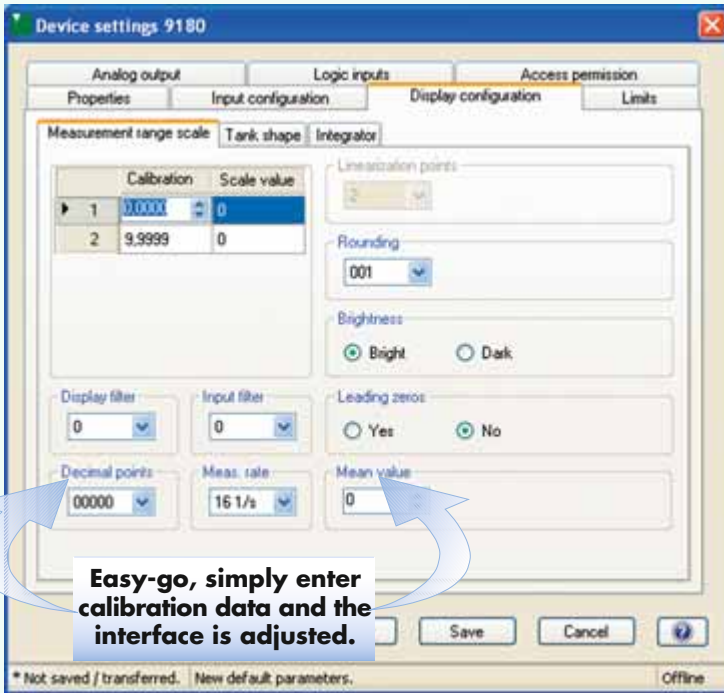


- Compilation of a device specific back-up file
- Simple parameter setting of the logic inputs (or interlinking)

Adjustment of different options, as start/stop trigger, measuring rate; storage of the measuring data and access rights

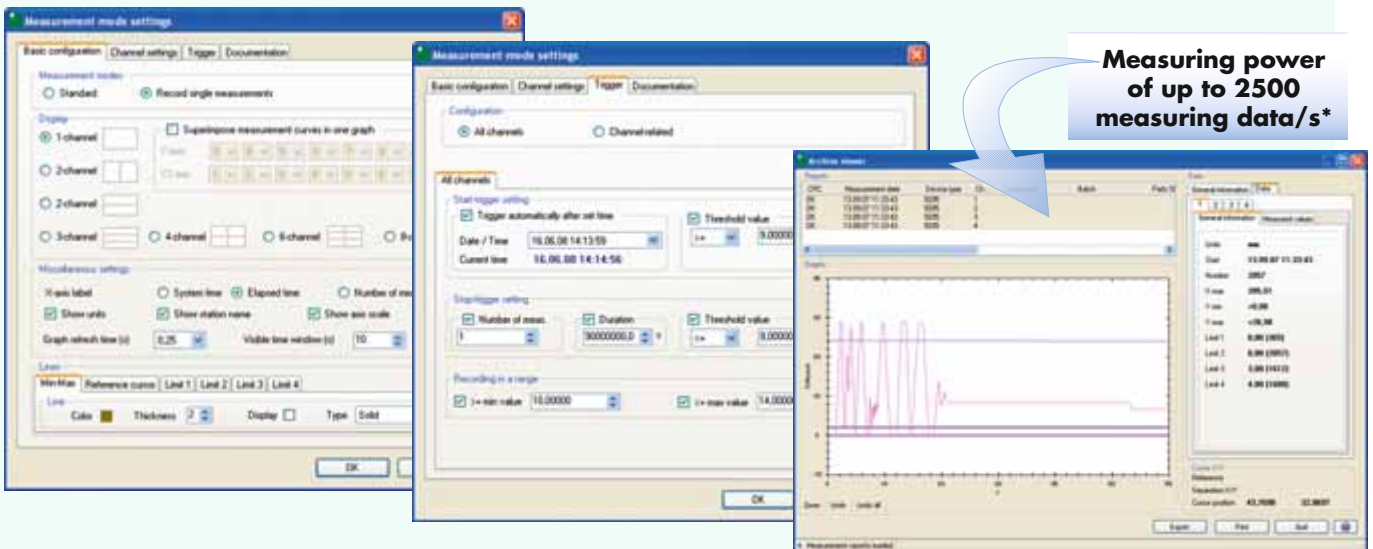

Export to Excel file

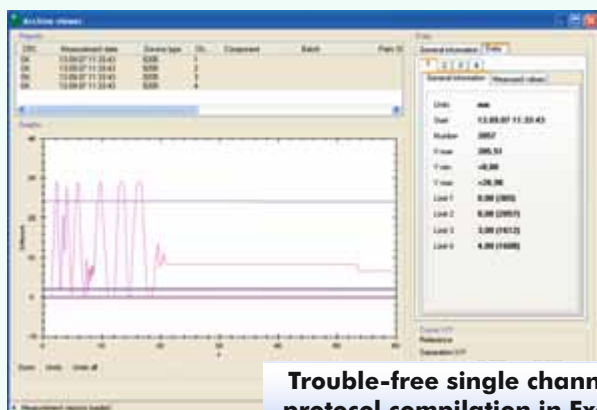

* 200 measurements/s for 9205-P001
2500 measurements/s for 9205-P100

burster Excel Messwerte		
Original measurement file		
Continuously file id		
Begin	13.09.2007 11:23:43	
Company	burster	
Tester	User	
Device caption	10000311	
Device-SPN	10000311	
Unit	mm	
Number of values	2057	
Measurement values	Time	Measurement value
1	0.00280	0.000
2	0.01560	0.000
3	0.11810	0.000
4	0.21800	0.000
5	0.31890	0.000
6	0.41780	0.000
7	0.51860	0.000
8	0.61820	0.000
9	0.71740	0.000
10	0.82140	0.000
11	0.91780	0.000
12	1.01850	0.000